


Sopii suoraan korvaamaan seuraavat ilmavaihtokoneet ilman muutoksia kanavistoon:

- ## Kanavajärjestys

Technical drawing of the front view of a square panel. The panel is square with a total width and height of 598 mm. The drawing includes the following dimensions and features:

- Overall Dimensions:** 598 mm (width) and 598 mm (height).
- Internal Spacing:**
 - Horizontal spacing between the first and second column of symbols: 509 mm.
 - Horizontal spacing between the second and third column of symbols: 484 mm.
 - Horizontal spacing from the left edge to the first column of symbols: 364 mm.
 - Vertical spacing between the top and bottom rows of symbols: 345 mm.
 - Vertical spacing from the top edge to the top row of symbols: 275 mm.
 - Vertical spacing from the bottom edge to the bottom row of symbols: 110 mm.
 - Horizontal spacing from the left edge to the first column of symbols: 114 mm.
- Symbols:**
 - Top row: 'J' (left), 'T' (middle), 'T' (right).
 - Bottom row: 'U' (left), 'P' (middle), 'P' (right).
- Other Features:**
 - Small circles (possibly screws or mounting points) are located at the corners and along the edges of the panel.
 - At the bottom center, there are two small circles with a diameter of $\varnothing 125$ (labeled as 125 UROS).

Mitat

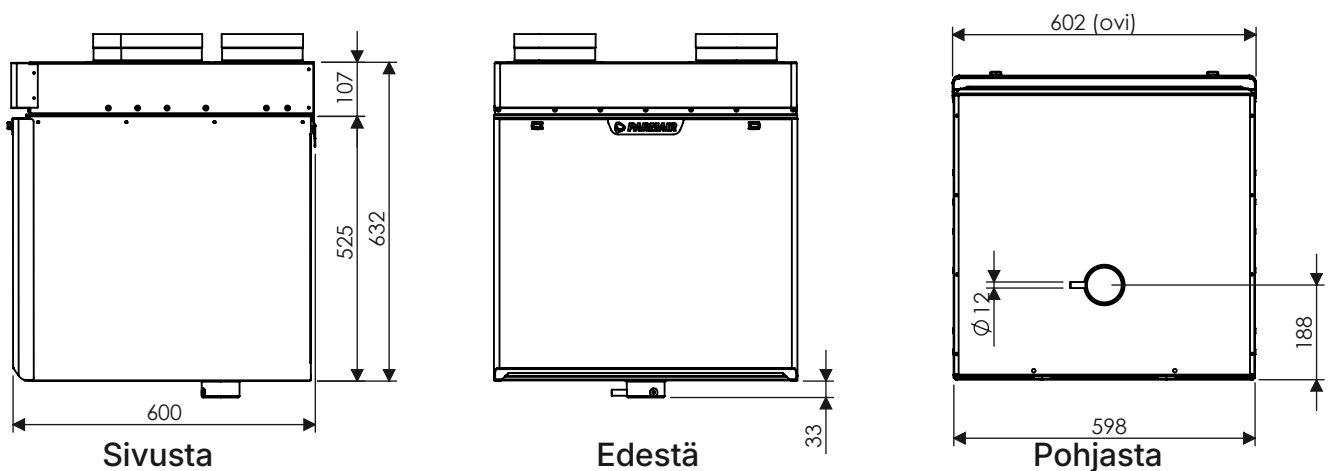

© Parmair Imanvaihto Oy